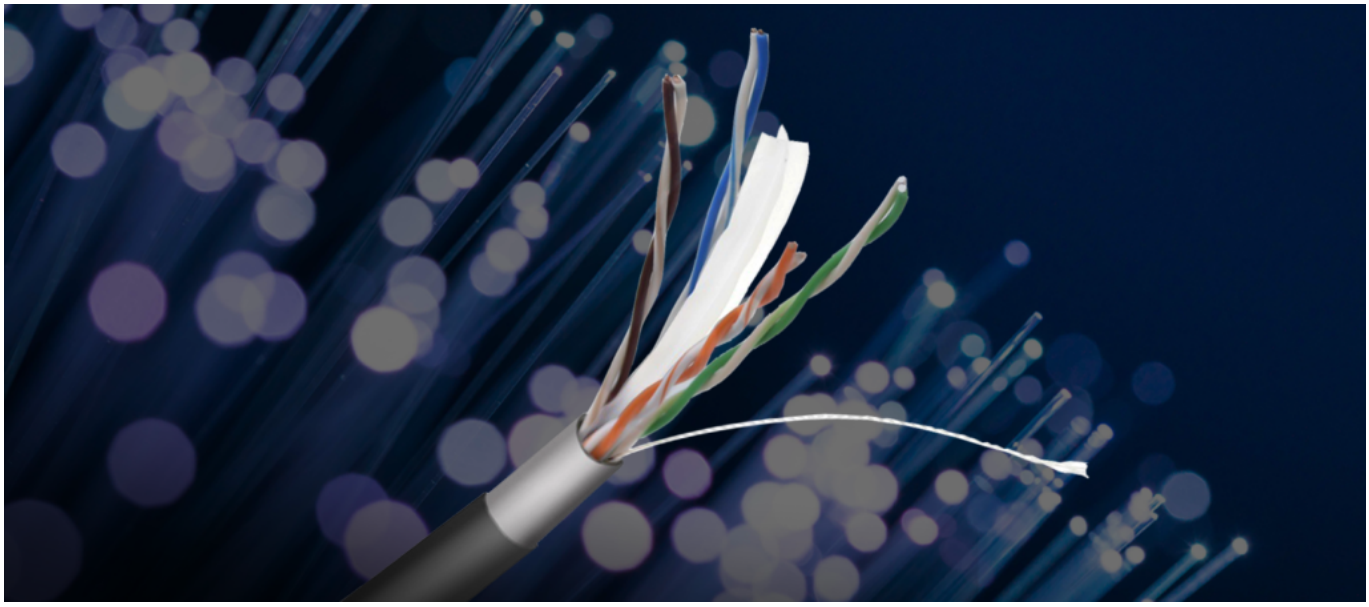



Our cross fillers made of PE can be produced and supplied in various dimensions according to your UTP cables specifications. => monthly capacity 20 000km

---

MATERIAL SAFETY DATA SHEET

ISO 9001 CERTIFICATE

Structure of UTP Cable

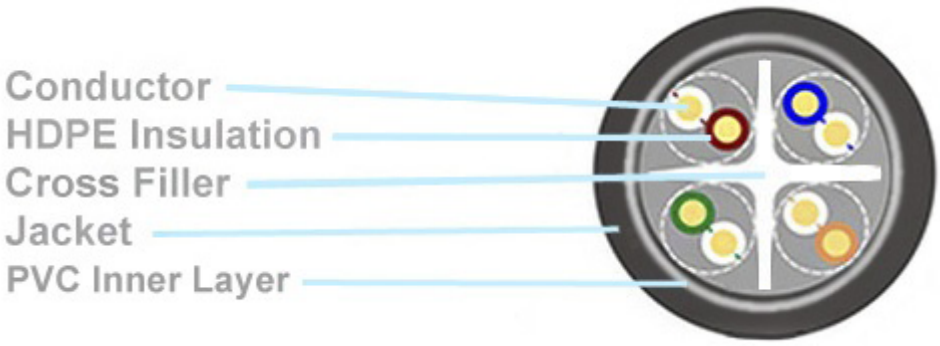

PE Cross Fillers Characteristics

ITEM	UNIT	SPECIFICATION
Length	mm	Length ± 0.3
Thickness	mm	Thickness ± 0.1
Material	–	HDPE
Shape	–	Cross
Surface	–	Smooth
Elongation	%	Min 500%
Tensile Strength	Kg/mm^2	Min 1.9
Melt Flow Index	g/10 min	0.1
Density	g/cm^3	0.96

